# 产品外观



# 规格信息

| Processor | OS | Android 11 |
|---|---|---|
| | CPU | RK3568 |
| | NPU | 0.8T FLOPS |
| Memory | Type | Onboard 2GB/4GB LPDDR4/4X |
| Storage | Type | Onboard 8GB/16GB/32GB EMMC |
| Display | Size | 7 inch, Vertical screen |
| | Resolution | 600*1024 |
| Identify | Camera | Binocular camera, 2 million wide dynamic |
| | Distance | 0.5~1M |
| | Fill light distance | ≤1M |
| | Identify patterns | Local identification, support offline, support mask identification |
| | Recognition speed | ＜0.2s |
| | Accuracy | ＞99.8% |
| | User capacity | 5000~20000 |
| | Identify patterns | Support 1:1 |
| | Anti-counterfeiting | Support |
| I/O | Extension ports | Power supply supports 12V input |
| | | RJ45，Support data upload and download |
| | | USB2.0（OTG） |
| | | RS485 |
| | | Other |
| Communication | Mode | TCP/IP Support offline mode |
| Wireless | Type | Support WiFi/BT |
| Capture | Quantity | 1 |
| Audio | Speaker | Support |
| Power | Input | 12V DC |
| Dimension | Size | 220mm*106mm*19mm |
| Environment | Operating | -20~70 ℃ ,90%RH |
| Software | Access Management | Support batch adding, updating, deleting and viewing of personnel library |
| | | Support network distribution and local configuration from the management server |
| | | Support batch registration of management page |
| | | Support attendance record query |
| | | Support docking with third-party attendance management platform |

## 整机尺寸
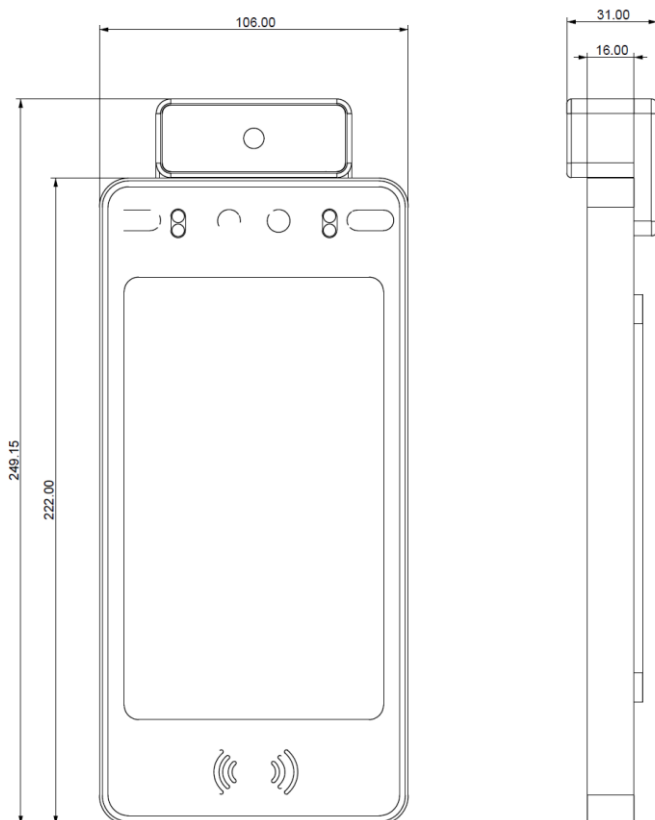


## 订购信息

| 型号 | 描述 |
|---|---|
| **P068-01A** | RK3568/2GB/ 8GB/ WIFI/ |
| **P068-01B** | RK3568/2GB/ 16GB/ WIFI/IC Card |

## 选配设备

| 描述 | 数量 |
|---|---|
| 测温模组 | 可选 |
| MIC功能 | / |
| NFC功能 | 可选 |
| 二代证识别 | / |
| 4G功能 | / |

## 包装信息

| 描述 | 数量 |
|---|---|
| 主机 | 1 pcs |
| 立杆/壁挂支架 | 1 pcs 可选 |
| 说明书 | 1 pcs |
| 电源适配器 | 1 pcs |
| 螺丝 | 若干 |

JWIPC TECHNOLOGY DEVELOPMENT CO., LTD    13/F, Building B, Haisong Edifice, Tairan 9th Road, Futian District, Shenzhen,China  www.jwipc.com

JWIPC