


### 产品图片

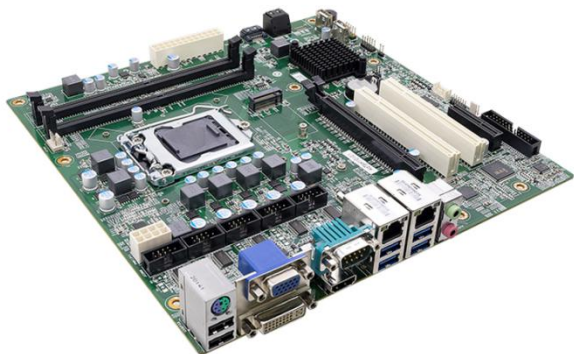

### 产品特性

- Support Intel LGA1151 Gen.6/7/8/9 i3/i5/i7/i9/G series CPU
- 2 DDR4 DIMM support up to 32GB DDR4 system memory
- Triple display/3SATA/2GbE/9USB/6COM/4PCI/3PCIe
- Using high Tg level pcb material to ensure wide temperature Stability
- Industrial I/o port protection blocks, effectively protects the system stable and reliable
- Using Industrial Interface Communication Chip and intel Network Chip to ensure the High Speed and Stability of data Transmission
- Optimizing I/O ports and expansion slot placement for easy expand

### 订购信息

| Model      | Chip. | Mem.  | Disp  | Stor. | USB3 | USB2 | COM | LAN | PCI  | PCIe  |
|------------|-------|-------|-------|-------|------|------|-----|-----|------|-------|
| AIoT9-H110 | H110  | 2DIMM | 3 (2) | 3SATA | 4    | 6    | 6   | 2   | 2PCI | 2PCIe |
| AIoT9-C236 | C236  | 4DIMM | 3 (3) | 5SATA | 4    | 10   | 6   | 2   | 2PCI | 2PCIe |

### 配件清单

| Description      | Specification                      | Quantity |
|------------------|------------------------------------|----------|
| SATA HDD cable   | SATA-7P HDD cable, L=550           | 1        |
| COM port cable   | DB9COM port cable/L=300            | 5        |
| I/O port bracket | Stainless steel rear I / O bracket | 1        |
| Driver CD        | Driver CD, Manual electronic file  | 1        |

### 产品规格

|           |            |   |
|-----------|------------|---|
| Product   | Model      | AIoT9-H110  |
|           | Type       | Micro ATX Industrial Motherboards   |
| Processor | CPU        | Support Intel LGA1151 Gen.6/7/8/9th i3/i5/i7/i9/Pentium/Celeron CPU       |
|           | Chipset    | Intel® H110 Chipset, Option C236 for E3 V5&V6                             |
| Memory    | Type       | H110 support 2×288Pin DDR4,C236 support 4 ×288Pin DDR4 DIMM               |
|           | Max        | up to 64GB  |
| Display   | Controller | Intel HD Graphics (Depends the CPU)                                       |
|           | Interface  | Supports Triple display of DVI-D+VGA+HDMI ,C236 support Independent tripl |

|                    |                           |  |
|--------------------|---------------------------|--|
|                    |                           | e display  |
| <b>Storage</b>     | <b>Type</b>               | H110 support SATA, C236 support 5 SATA3.0 port Support SATA Raid0/1/5/10<br>1 M.2 2280 (SATA3.0 bus) SSD   |
| <b>Audio</b>       | <b>Type</b>               | Support Mic-in, Speaker-out  |
| <b>Network</b>     | <b>LAN</b>                | Dual intel GbE Ethernet ports , LAN1: Intel I219LM, LAN2: Intel I211AT   |
| <b>I/O</b>         | <b>USB</b>                | 4 USB3.0 Type A Rear I/O, 2 USB3.0 pin header inside<br>2USB2.0 Type A Rear I/O ,1 USB2.0 Type A inside for USB Dongle<br>2 USB2.0 pin header inside for front I/O (C236 support 6 USB2.0) |
|                    | <b>LPT</b>                | 1 x LPT port   |
|                    | <b>COM</b>                | 6 COM(Scalable 10 COM) ,COM1 support RS232/422/485, COM2-6 support RS232   |
|                    | <b>KB/Mouse Connector</b> | 1×PS/2 2 in 1 Connector & 2 x USB 3 in 1 Connector   |
|                    | <b>Digital I/O</b>        | 8-bit Digital I/O  |
|                    | <b>LPC</b>                | Support 2 x 6 Pin LPC bus, extensible COM module, etc.   |
|                    | <b>TPM</b>                | Support 1 x TPM interface, extensible TPM module   |
| <b>Power</b>       | <b>Input</b>              | ATX power supply, support ATX/AT mode  |
| <b>Expansion</b>   | <b>I/O</b>                | 1 x PCIe x16, 1 x PCIe x4 slot<br>2 x PCI slot (32bit)<br>1 x M.2 2280 Slot support SATA SSD   |
| <b>Environment</b> | <b>Temperature</b>        | Operating: 0~60℃, Storage: -40~80℃   |
|                    | <b>Humidity</b>           | 5% to 95%, Non-condensing  |
| <b>Function</b>    | <b>Watch Dog</b>          | Software programmable 1~255 second/minute system interrupt/reset   |
| <b>System</b>      | <b>BIOS</b>               | AMI UEFI BIOS  |
|                    | <b>Operating system</b>   | Win7/Win10/WES7/Linux , 32bit/64bit  |
| <b>PCB</b>         | <b>Color</b>              | PCB is sprayed with industrial green paint   |
|                    | <b>Dimensions</b>         | 244mm X 244mm  |